


TECHNICAL DATA SHEET

General Description

ADFORS revolutionized drywall installation by providing the worlds first fiberglass joint tape. FibaTape® is self-adhesive and easy to apply. The open fiberglass mesh eliminates blisters and bubbles commonly found with paper tape.

Properties

- Reduced dry time - Embedding coat is not required
- Self-adhesive - Easy application
- Smooth finish - Eliminates blisters and bubbles commonly found with paper tapes
- Yellow option - Yellow tape remains visible until properly covered

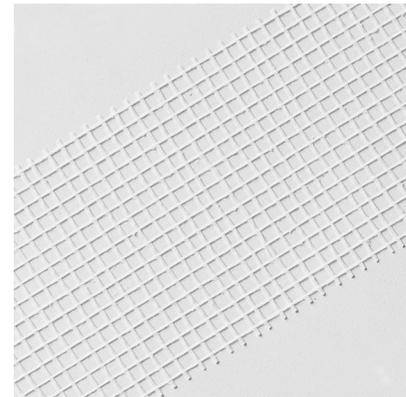

Technical Characteristics

PROPERTY	IMPERIAL	METRIC	TESTING
Fabric Technology	knit		
Construction	9x8		ASTM D-3775
Warp Tensile	50 lb/in	438 N/5cm	ASTM C-474
Weft Tensile	105 lb/in	919 N/5cm	ASTM C-474
Weight	1.68 oz/yd ²	56.96 g/m ²	ASTM D-3776
Thickness	0.011 in	0.279 mm	ASTM D-1777 & C-475
Coating	SBR Latex		
Adhesive	WB		

Edited by:
SAINT-GOBAIN ADFORS America

SAINT-GOBAIN ADFORS America
1795 Baseline Road
Grand Island, NY 14072 USA
Tel: 716-775-3900
Fax: 716-775-3901
www.adfors.com

SAINT-GOBAIN ADFORS America reserves the right to change the information given herein without prior notice

Technical Data Sheet
Last update: 03/26/19